

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
30 October 2003 (30.10.2003)


PCT

(10) International Publication Number
WO 03/089750 A1

- (51) International Patent Classification⁷: E06C 1/383, 7/42, 7/48
- (21) International Application Number: PCT/AU03/00469
- (22) International Filing Date: 17 April 2003 (17.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002100309 19 April 2002 (19.04.2002) AU
- (71) Applicant (for all designated States except US): LAD-DALOC PTY LTD [AU/AU]; Unit 3, 3 Lansdowne Road, St Kilda, VIC 3181 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): WELSH, Graham, Kennedy [AU/AU]; UNIT 3, 3 Lansdowne Road, St Kilda, VIC 3181 (AU).
- (74) Agent: BLAKE DAWSON WALDRON; Level 35, Grosvenor Place, 225 George Street, Sydney, NSW 2000 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COLLAPSIBLE LADDER

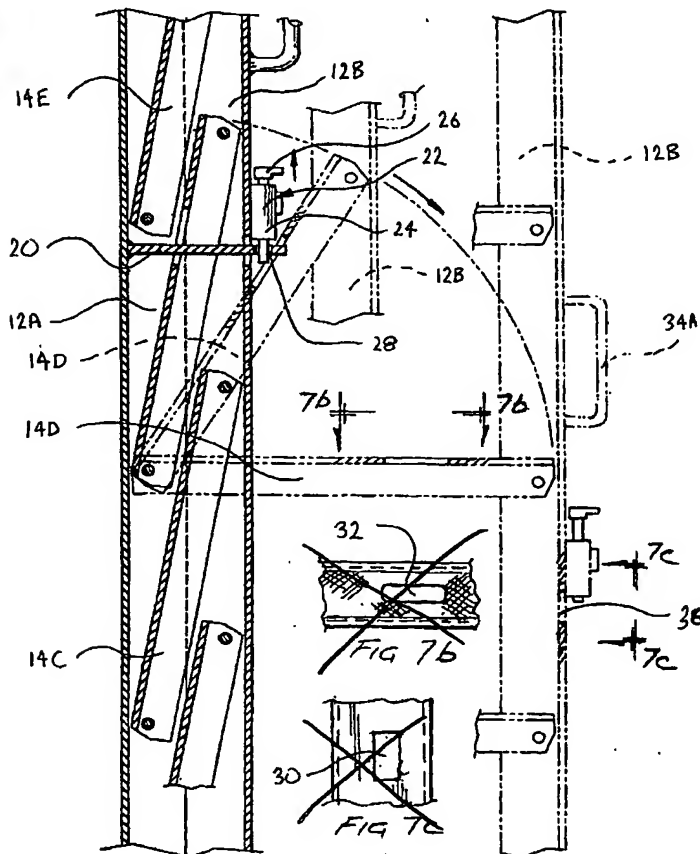

(57) Abstract: The present invention relates broadly to a collapsible ladder (10) comprising a pair of opposing rails (12A) and (12B) interconnected with a plurality of rails (14A) to (14J). The collapsible ladder (10) can be moved or manipulated from a collapsed condition to an operative condition. In the collapsed condition the opposing pair of rails are (12A/B) locate adjacent or abut one another whereas in the operative position the rails (12A/B) are laterally spaced with the interconnecting rungs (14A) to (14J) being disposed substantially perpendicular thereto. Each of the rungs such as (14A) is at its opposing ends pivotally connected to respective of the opposing pair of rails (12A/B). This pivotal connection between the rungs such as (14A) and rails (12A/B) allows the ladder (10) to move from its operational to collapsed conditions.

WO 03/089750 A1

WO 03/089750 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.